


# Vehicle products by KOSKISEN plywood FLOORS

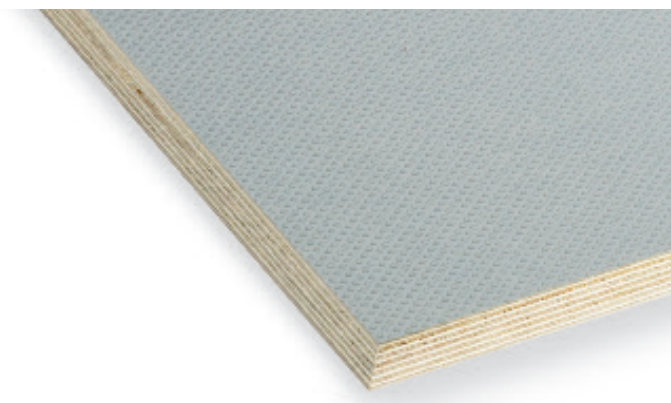


## KoskiCarat

- Coated birch plywood imprinted with thousands of small raised diamond shapes
- Film weights from 220 g/m<sup>2</sup> to 440g/m<sup>2</sup>, dark brown, light or dark grey, silver grey
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm

## KoskiCrown

- Coated birch plywood imprinted with circle crown pattern
- Film weights 220/m<sup>2</sup> to 440g/m<sup>2</sup>, dark brown, black, light or dark grey, silver grey
- Thickness 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm

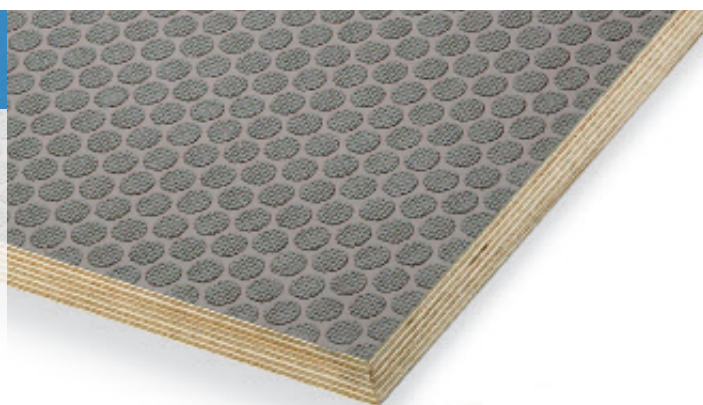

## KoskiDeck

- Coated birch plywood with a slip resistant wire mesh pattern
- Film weights from 120g/m<sup>2</sup> up to 440g/m<sup>2</sup>, dark brown, light and dark grey
- Thickness: 6,5 - 30 mm
- Panel sizes up to 1880 x 4000 mm




## KoskiGranite

- Coated birch plywood or chipboard imprinted with mesh, crown, carat or ruby pattern
- Multicolor special coating
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm



# Vehicle products by KOSKISEN plywood FLOORS

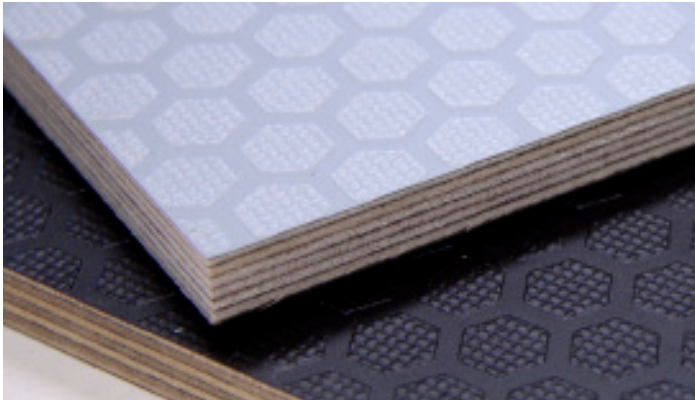


## KoskiRuby

- Coated birch plywood imprinted with a hexagonal ruby pattern
- Film weights 220g/m<sup>2</sup> to 440g/m<sup>2</sup>, dark brown, black, light or dark grey, silver grey
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm


## KoskiDiamond

- Coated birch plywood imprinted with various diamond embossing
- Film weights from 220g/m<sup>2</sup> to 800g/m<sup>2</sup>
- Thickness: 9 - 30 mm
- Panel sizes up to 1525 x 3050 mm

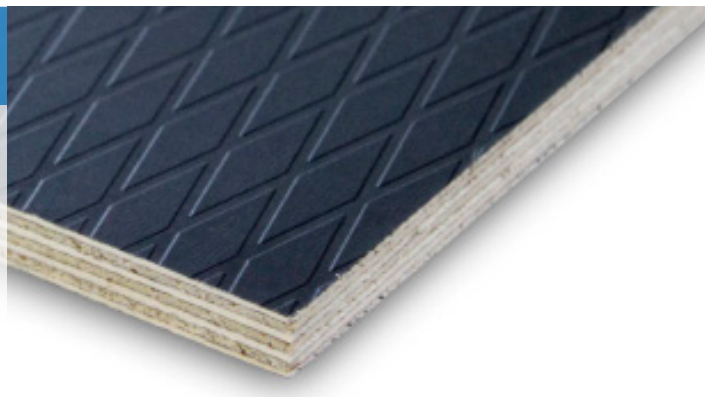

## KoskiBond F

- Coated birch plywood with fire properties combined with good adhesion properties
- Fire certificate EN 45545-2 (08/2013) fulfills R10 Hazard level HL 3
- Thickness: 4 - 30 mm
- Panel sizes up to 1525 x 3050 mm

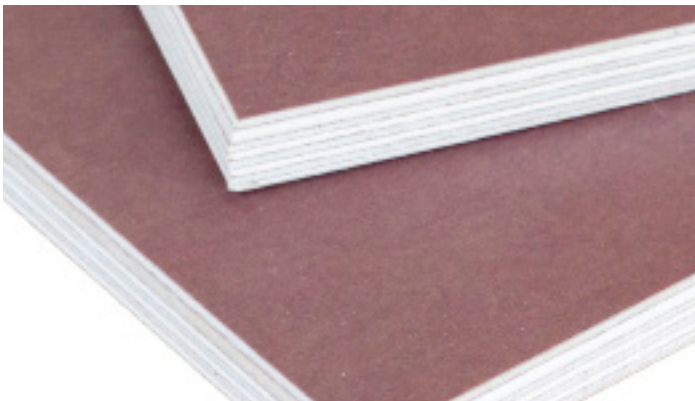


## KoskiFutura Antislip

- Birch plywood coated with glass fibre reinforced plastic
- Durable slip resistance surface black or grey
- Thickness 9 - 30 mm
- Panel Sizes up to 1525 x 3600 mm





# Vehicle products by KOSKISEN plywood FLOORS

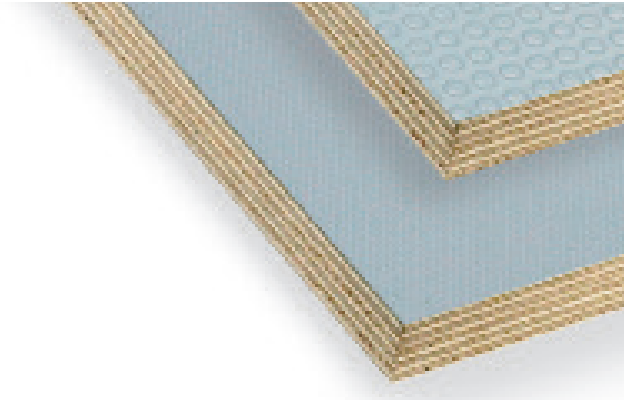

## KoskiFutura Textured

- Plastic coated birch plywood
- Thickness: 4 - 30 mm
- Panel sizes up to 1525 x 3600 mm

## KoskiSound

- Birch plywood with 4 mm sound barrier in the middle of the board
- Thickness 12 - 21 mm
- Available also film faced
- Panel sizes up to 1450 x 3000 mm



## KoskiFloor Safety

- PU coated birch plywood
- Standard colour: black
- Thickness 9 - 30 mm
- Panel sizes up to 1525 x 3600 mm



## KoskiDuo

- Plastic coated birch plywood with rice pattern
- Grey color like RAL 7004
- Thickness 6,5 - 30 mm
- Panel sizes up to 1525 x 3600 mm



# Vehicle products by KOSKISEN plywood FLOORS



## KoskiSound F

- Coated birch plywood fulfilling the demanding requirements of EN 45545-2
- Thickness: 12 - 30 mm
- Panel sizes: 1220 x 2400/2440 mm and 1450 x 3000 mm
- Achieves R10 the Hazard Level HL3

For more detailed information please check the available product leaflets on our web page [www.koskisen.com](http://www.koskisen.com).

**Committed to Wood**  
[www.koskisen.com](http://www.koskisen.com)



2412-CPR-1301-01

